

- CLASSIC SERIES™

Make hours of work look like days. Rough-hewn appearance. Simple installation.

Available Colors:

- Dale Hollow
- Woodford
- Antique Grey Sulfur Springs
- Aspen
- Drakes Creek



Coverage areas are based on tight-fitted joints to achieve a dry-stacked appearance.

Unit Sizes: Modular units are based on a 4" face height and random lengths of 4"-19".


Thickness range is 1.5"-2.25".


Packaging: 9 SF per carton based on dry stacking (no mortar joints).

Tech Data:

- Compressive Strength (at 28 days) Meets or exceeds ASTM standard 1800 PSI typical result 5,500 PSI avg. min.
- Water Absorption (at 28 days) Does not exceed 15.2%
- Fireproof ----Yes: Will not contribute to smoke or flame development
- Colorfastness---- Existing applications show no undesirable change in coloring after years of weathering

For installation guidelines and information visit www.mtstone.com

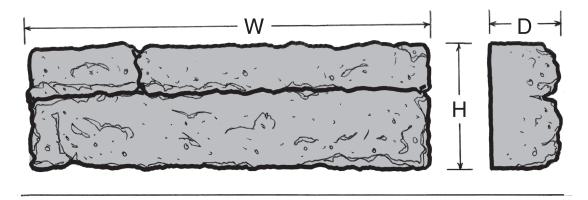

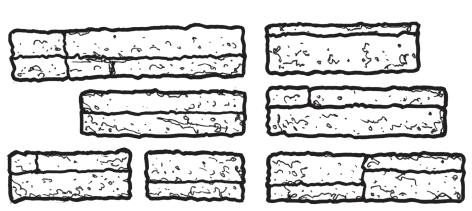

For Unit Dimensions See Description Above